

Product Information

Silicone Coatings



DOW CORNING

Dow Corning® AllGuard Silicone Elastomeric Coating

FEATURES & BENEFITS

- Provides long-term waterproofing protection
- Maintains water protection properties even when exposed to sunlight, rain, snow, or temperature extremes

COMPOSITION

- One-component, pigmented, water-based silicone elastomer

Water-based silicone elastomer for waterproofing above-grade exterior masonry substrates

APPLICATIONS

- Dow Corning® AllGuard Silicone Elastomeric Coating is designed to waterproof above-grade exterior masonry substrates, such as concrete block, fluted block, brick, stucco, synthetic stucco, poured concrete, precast concrete, exterior insulation finish systems (EIFS), and previously coated masonry substrates.

TYPICAL PROPERTIES

Specification Writers: These values are not intended for use in preparing specifications. Please contact your local Dow Corning sales office or your Global Dow Corning Connection before writing specifications on this product.

Test ¹	Property	Unit	Result
ASTM D 2369	Solids Content	% by weight	58.6
		% by volume	50.1
ASTM D 1475	Specific Gravity	lb/gal (kg/L)	9.64 (1.155)
ASTM D 2196	Viscosity ²	cps (Pa s)	37,500 (37.5)
ASTM D 1849	High Temperature Stability (no change in viscosity)	days	> 28
EPA Method 24	Volatile Organic Content ³ (VOC)	g/L (lb/gal)	< 50 (< 0.42)
As Cured			
ASTM D 2240	Durometer Hardness, Shore A	points	38
ASTM D 412	Tensile Strength	psi (MPa)	> 145 (1.00)
ASTM D 412	Elongation	%	600
ASTM D 1653	Permeance	English perms (ng/(m ² .Pa.s))	43.2 (2480)
ASTM D 522	Room Temperature, Flex, 1/8" mandrel		Pass
ASTM C 711	Low Temperature Flex, 1/4" mandrel		Pass
ASTM D 3274	Fungus Resistance		No growth
ASTM D 6904	Wind Driven Rain ⁴		Pass
ASTM D 2243	Freeze/Thaw Resistance		No Change

¹ASTM: American Society of Testing and Materials.

²Brookfield HAV, spindle #3, 2 rpm.

³VOC includes all Dow Corning approved colors (EPA method 24 or 40 CFR 59.406 data).

⁴Measured on coating system with two coats (10 mil dry film thickness) of Dow Corning AllGuard Silicone Elastomeric Coating.

DESCRIPTION

Dow Corning AllGuard Silicone Elastomeric Coating is a one-part, 100 percent water-based silicone elastomer supplied in three tint bases for pigmenting at distributor locations. The coating is typically applied in two coats. The use of *Dow Corning*[®] AllGuard Primer may be necessary based on the substrate. The coating can be roller, brush, or spray applied. It cures to form a flexible membrane that is impervious to water but has the ability to “breathe,” allowing water vapor to escape from inside the substrate. Its matte finish minimizes brush and roller marks. The coating provides long-term waterproofing protection, withstanding hurricane-force, wind-driven rain; normal movement imposed by seasonal thermal contraction and expansion; ultraviolet radiation; and the elements. The coating maintains its water protection properties even when exposed to sunlight, rain, snow, or temperature extremes.

Once pigmented, it is a ready-to-use material that can be applied between -6°C (20°F) and 38°C (100°F) to a clean, dry surface. The average drying time is 4 to 8 hours, depending upon temperature, humidity, and wind conditions. If the temperature drops below -6°C (20°F) after the coating is applied, the average drying time will increase. *Dow Corning AllGuard Elastomeric Coating* requires temperatures higher than -6°C (20°F) for a cumulative total of 24 hours to dry.

Dow Corning AllGuard Silicone Elastomeric Coating will attain full adhesion and physical properties in 7 to 14 days.

Dow Corning AllGuard Silicone Elastomeric Coating is available in more than 55 standard colors or can be custom colored to order.

HOW TO USE

When properly applied and cured, *Dow Corning AllGuard Silicone Elastomeric Coating* provides a fast, easy, and effective method of keeping exterior above-grade surfaces waterproof.

Design Considerations

In many building designs, areas such as ledges and windowsills allow air-borne dirt and soot to accumulate. Surfaces exposed to concentrated water run-down may appear dirty or streaky over time and the coating may become difficult to clean. In those areas, drip edges should be installed before the coating is applied to rechannel water away from the surface to protect the long-term appearance of the facade.

The success of a drip edge is achieved by moving the runoff water away from the wall onto the drip edge, creating a non-uniform runoff.


A drip edge can be fabricated from the same material as the windowsills or from other formable composites. The drip edge can be mechanically adhered to the substrate or attached with *Dow Corning*[®] 795 Silicone Building Sealant (see Figure 1).

Surface Preparation

All surfaces to be coated with *Dow Corning AllGuard Silicone Elastomeric Coating* must be prepared as described in the most recent *Dow Corning AllGuard Silicone Elastomeric Coating Application and Maintenance Guide* (Form No. 62-617). The following is a short reference guide for surface preparations.

All surfaces must be clean and free of dirt, frost, dust, oil, grease, mold, fungus, efflorescence, laitance, peeling coating, chalking coating, and any other foreign material. Green concrete must be allowed to cure 28 days before application of *Dow Corning AllGuard Silicone Elastomeric Coating* (see “Limitations”). Pressure clean, wire

brush, or grind the wall surface to remove all of the above materials. Repair any damaged concrete, stucco, block, brick, masonry, or EIFS. Repair cracks larger than 1/16" (1.6 mm) with a material that is compatible with the substrate and *Dow Corning AllGuard Silicone Elastomeric Coating*. *Dow Corning*[®] 790 or 795 Silicone Building Sealant or *Dow Corning*[®] 791 Silicone Perimeter Sealant can be used for crack repairs.

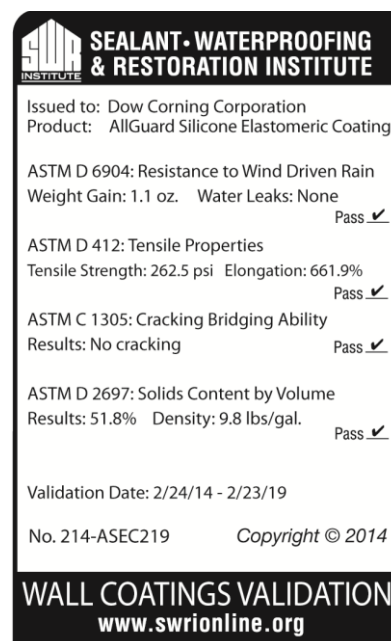

Coating

A minimum of two coats of *Dow Corning AllGuard Silicone Elastomeric Coating* are necessary to achieve the required 10-mil (0.25-mm) minimum dry film thickness to attain protection against through-water penetration and to qualify for a project-specific warranty.

Apply the coating in a 10-mil (0.25-mm) wet thickness (a job-specific mockup is recommended to determine actual usage). Due to *Dow Corning AllGuard Silicone* being 50% solids, two thick wet coats (10- to 12-mil [0.25- to 0.30-mm]) will result in the required 10-mil (0.25-mm) dry coating thickness. On occasion, a third coat may be necessary on porous or rough surfaces

Dow Corning is a registered trademark of Dow Corning Corporation. The Corning portion of the Dow Corning trademark is a trademark of Corning, Incorporated, used under license. *We help you invent the future* is a trademark of Dow Corning Corporation. Simple Green is a trademark of Sunshine Makers, Inc.


to achieve the minimum dry film thickness.

Apply using a ¾ to 1½" (19- to 38-mm) nap, polyester, or 50/50 polyester/wool blend roller cover, nylon bristle brush, or airless sprayer.

When applying the coating with a roller, apply it in a fan pattern to achieve uniform thickness. Always finish roller applications in the same direction to reduce visual surface texture differences. When applying with an airless sprayer, follow the

spray application with a back roll of material to ensure a uniform coating and appearance.

Figure 1: Drip Edge Design Consideration

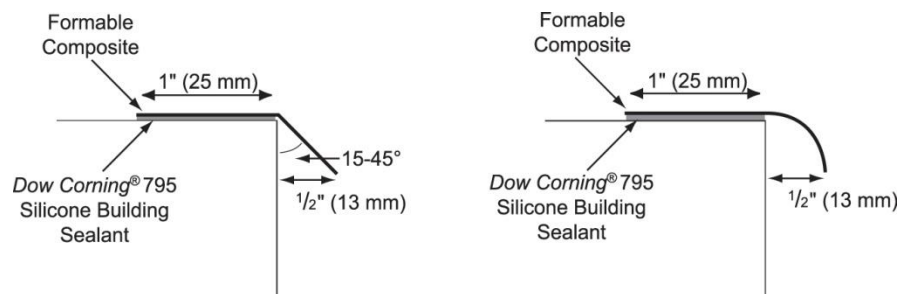

Allow the coating to dry (typically 2 to 4 hours) before applying additional coats. Note: Do not thin or cut back *Dow Corning AllGuard Silicone Elastomeric Coating*.

After the additional coat has been applied, the average drying time is 4 to 8 hours, depending upon temperature, humidity, and wind conditions. *Dow Corning AllGuard Silicone Elastomeric Coating* will attain full adhesion and physical properties in 7 to 14 days.

Low Temperature Application

If temperatures drop below -6°C (20°F), the coating will freeze on the surface until the temperature increases. This will not affect the cured properties of the coating, but will extend the drying time.

The coating should be dry to touch, not simply freeze between coats. Application equipment such as rollers and the tips of spraying equipment should be kept above 0°C (32°F) when not in use.

Dow Corning AllGuard Silicone Elastomeric Coating was developed to obtain good adhesion to the substrate without the need of a primer. To verify that this adhesion is sufficient,

field adhesion tests must be performed as described in the *Dow Corning AllGuard Silicone Elastomeric Coating Application and Maintenance Guide*. If adhesion does not meet requirements, a field adhesion test with primer should be performed. To obtain a project-specific warranty, field adhesion testing, meeting the requirements, must be performed and documented. Surface adhesion tests on each type of substrate and each face of the structure must be field adhesion tested and acceptable per the *Dow Corning AllGuard Silicone Elastomeric Coating Application and Maintenance Guide*.

Maintenance

Walls should be inspected at least once a year. If coating becomes damaged, repair damaged portion to maintain weatherproofing performance. Any touch-ups or repairs to the coating can be completed by applying *Dow Corning AllGuard Silicone Elastomeric Coating* to the clean, dry area in accordance to the recommendations in this data sheet and the *Dow Corning AllGuard Silicone Elastomeric Coating Application and Maintenance Guide*.

Dow Corning recommends routine cleaning to minimize dirt accumulation, following these guidelines:

1. Abrasive cleaners and cleaning equipment should never be used.
2. Clean using pressurized water and a basic cleaning agent such as TSP (Trisodium Phosphate)¹ or Simple Green™. Water pressure should not exceed 1,500 psi (10.3 MPa) to clean the surface without removing the coating material from the wall surface. A small test patch should be done first to determine how long the cleaning agent should be left on the surface before rinsing.
3. Removal of stubborn marks may require the use of a soft bristle brush with the cleaning solution. Avoid stiff brushes that may abrade the coating.

¹Follow solvent manufacturer's recommended safe handling instructions and applicable federal, state, and local laws.

**HANDLING
PRECAUTIONS
PRODUCT SAFETY
INFORMATION REQUIRED FOR
SAFE USE IS NOT INCLUDED IN
THIS DOCUMENT. BEFORE
HANDLING, READ PRODUCT
AND SAFETY DATA SHEETS
AND CONTAINER LABELS FOR
SAFE USE, PHYSICAL AND
HEALTH HAZARD
INFORMATION. THE SAFETY
DATA SHEET IS AVAILABLE ON
THE DOW CORNING WEBSITE
AT DOWCORNING.COM, OR
FROM YOUR DOW CORNING
SALES APPLICATION
ENGINEER, OR DISTRIBUTOR,
OR BY CALLING
DOW CORNING CUSTOMER
SERVICE.**

USABLE LIFE AND STORAGE

Protect *Dow Corning* AllGuard Silicone Elastomeric Coating and *Dow Corning* AllGuard Primer from freezing. Store in a cool, dry place out of the weather. When properly stored in its original, unopened container above 1°C (34°F) and below 32°C (90°F), *Dow Corning* AllGuard Silicone Elastomeric Coating and *Dow Corning* AllGuard Primer have shelf lives of 9 months and 18 months, respectively, from date of manufacture. Refer to product packaging for "Use by Date."

If *Dow Corning* AllGuard Silicone Elastomeric Coating is stored at temperatures below -6°C (20°F) for longer than 8 hours, the coating will start to freeze. Allow the *Dow Corning* AllGuard Silicone Elastomeric Coating to sit at temperatures greater than 20°F for at least 8 hours or until the material thaws before application.

PACKAGING INFORMATION

Dow Corning AllGuard Silicone Elastomeric Coating and

Dow Corning AllGuard Primer are available in 5-gal (19-L) pails (42-46 lb [19-21 kg] per pail depending on color).

LIMITATIONS

Dow Corning AllGuard Silicone Elastomeric Coating should not be applied:

- When there is a threat of rain within the next 24 hours or the relative humidity is in excess of 90 percent (because conditions would not permit complete surface drying)
- On below-grade applications
- On non-masonry substrates such as metal, wood, plastic, or asphaltic materials, or on tar-contaminated masonry
- As a decorative paint (*Dow Corning* AllGuard Silicone Elastomeric Coating is not warranted for aesthetics)
- On newly applied or green cementitious materials; Industry guidelines recommend at least 28 days cure before painting or coating the substrates (see SSPC, 2010 Painting Manual, Chapter 3.1. Concrete Surface Preparation)

This product is neither tested nor represented as suitable for medical or pharmaceutical uses.

HEALTH AND ENVIRONMENTAL INFORMATION

To support customers in their product safety needs, Dow Corning has an extensive Product Stewardship organization and a team of Product Safety and Regulatory Compliance (PS&RC) specialists available in each area.

For further information, please see our website, dowcorning.com or consult your local Dow Corning representative.

LIMITED WARRANTY INFORMATION – PLEASE READ CAREFULLY

The information contained herein is offered in good faith and is believed to be accurate. However, because conditions and methods of use of our products are beyond our control, this information should not be used in substitution for customer's tests to ensure that our products are safe, effective, and fully satisfactory for the intended end use. Suggestions of use shall not be taken as inducements to infringe any patent.

Dow Corning's sole warranty is that our products will meet the sales specifications in effect at the time of shipment.

Your exclusive remedy for breach of such warranty is limited to refund of purchase price or replacement of any product shown to be other than as warranted.

**TO THE FULLEST EXTENT
PERMITTED BY APPLICABLE
LAW, DOW CORNING
SPECIFICALLY DISCLAIMS
ANY OTHER EXPRESS OR
IMPLIED WARRANTY OF
FITNESS FOR A PARTICULAR
PURPOSE OR
MERCHANTABILITY.**

**DOW CORNING DISCLAIMS
LIABILITY FOR ANY
INCIDENTAL OR
CONSEQUENTIAL DAMAGES.**

We help you invent the future.™

dowcorning.com

Dow Corning is a registered trademark of Dow Corning Corporation. The Corning portion of the Dow Corning trademark is a trademark of Corning, Incorporated, used under license. *We help you invent the future* is a trademark of Dow Corning Corporation.

Simple Green is a trademark of Sunshine Makers, Inc.

XIAMETER is a registered trademark of Dow Corning Corporation.

© 2000–2016 Dow Corning Corporation, a wholly owned subsidiary of The Dow Chemical Company. All rights reserved.